




BELLOWS RADERBELT®

The bellows of mineral or vegetal tanned leather are suitable for vents or protections of machines (robots, cylinders, guide pins). They are weatherproof and oils resistant. The assembly by wet molding and/or sewing can then be protected by coating. The leather bellows are very coveted in environments constrained to fire or abrasive projections. We alternate the outer and inner flanges. Depending on the need, a crimping by a collar is placed therein.



SPECIFICATIONS

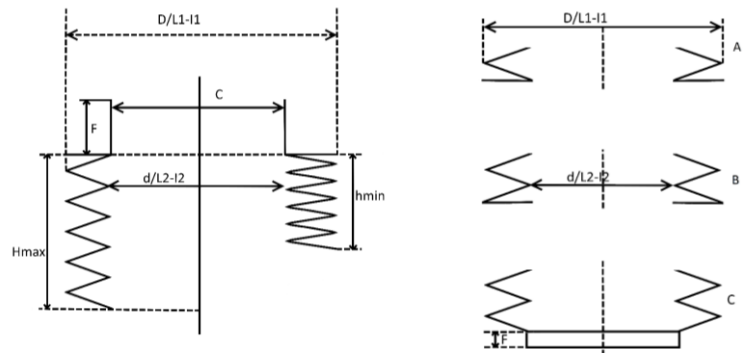

Hmax = Developed height
L2 = Inner fold length
d = Inner fold diameter
C = Collar

D = Outer fold diameter
B = Link inward
L1 = Outer fold length

hmin = Compressed height
A = Link outward
L1 = Outer fold length
F = Collar height

PRODUCTION PROCESS

